

Data Sheet no. 1.28-1

Exciting Transformer Type PEOM

Application

These exciting transformers type PEOM are designed to feed the tuneable modular reactors and reactor cascades of type DERI in resonant circuits with a well adapted power and voltage.

The transformer is provided with output voltage taps adapted to the test conditions and the type of load (mainly depending on the expected quality factor Q of the system). The number and the ratings of the voltage taps is fixed after all test conditions are clarified.

Brief description

The exciting transformer is installed in the separate steel tank with corrugated walls. The tank is hermetically sealed. The walls are executing the heat dissipation and the oil expansion due to changing of ambient temperature and heating. Insulating oil is a mineral transformer oil according IEC 60296.

The exciting transformer is equipped with a current transformer for recording the secondary current and with surge arresters to prevent damages resulting from transients due to disruptive discharges of the test object.

The transformer is designed for the same duty cycle and ambient conditions as the tuneable modular reactor. It is available for both power frequencies, 50 and 60 Hz.


The exciting transformer is built as an isolation transformer with two electrostatic shields inside, in order to prevent coupling of electrical noise to the HV side.

The taps of the exciting transformer have to be connected under switched-off circuit state by hand with the tuneable modular reactor and dependent on the load (capacitance).

The types described in the table are basic types, taps are adapted to the test system specification.

| Type designation | Rated Power (kVA) | Max. output voltage (kV) | Approx. Dimensions (LxWxH) (mm ³) | Total Weight (kg) | Weight of Oil (kg) |
|------------------|-------------------|--------------------------|---|-------------------|--------------------|
| PEOM 20/20 | 20 | 20 | 1350x890x1400 | 750 | 190 |
| PEOM 30/20 | 30 | 20 | 1380x890x1450 | 820 | 190 |
| PEOM 50/30 | 50 | 30 | 1480x1250x1680 | 1200 | 370 |
| PEOM 75/30 | 75 | 30 | 1480x1250x1680 | 1250 | 370 |
| PEOM 100/50 | 100 | 50 | 1480x1250x1680 | 1400 | 370 |
| PEOM 120/90 | 120 | 90 | 1900x1370x1750 | 1660 | 550 |
| PEOM 150/50 | 150 | 50 | 1600x1370x1750 | 1660 | 550 |
| PEOM 150/90 | 150 | 90 | 1900x1370x1750 | 1660 | 550 |
| PEOM 200/90 | 200 | 90 | 1900x1370x1850 | 1750 | 600 |
| PEOM 250/50 | 250 | 50 | 1900x1370x1850 | 1750 | 600 |
| PEOM 300/90 | 300 | 90 | 1950x1500x1910 | 1950 | 650 |
| PEOM 400/65 | 400 | 65 | 1850x1600x1910 | 2350 | 680 |
| PEOM 500/80 | 500 | 80 | 2000x1600x2100 | 2470 | 700 |

PEOM a/b: a: power in kVA
b: max. output voltage in kV

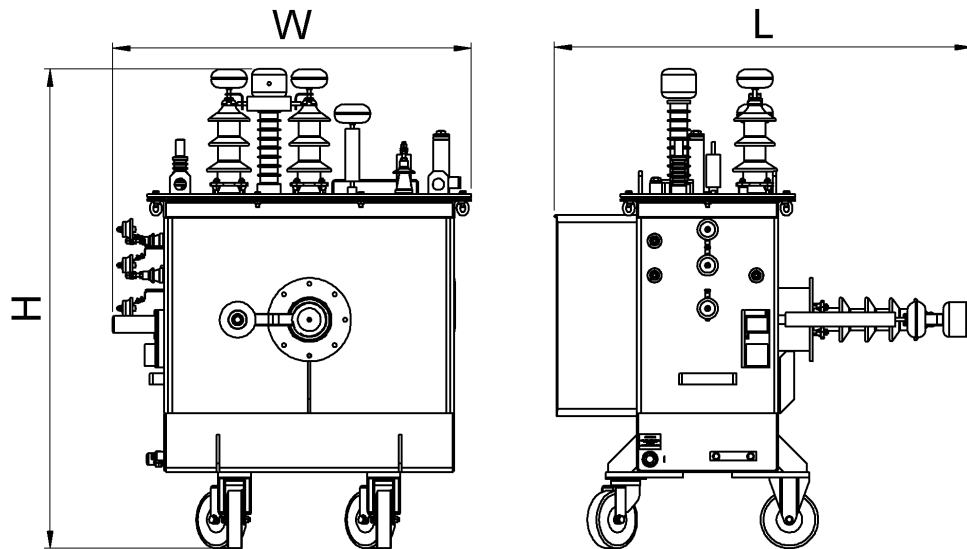

Schematic sketch of exciting transformer

For further information please contact:

or our local representative:

HIGHVOLT Prüftechnik Dresden GmbH
Marie-Curie-Strasse 10

D-01139 Dresden / Germany

Tel. +49 351 8425 648
Fax +49 351 8425 679
e-mail dresden@highvolt.de
webseite <http://www.highvolt.de>